

OG6 200L/Min Oval Gear Meter




The distributor
of your choice!



IDEAL FOR

- Engine test
- Oil flow
- High viscosity liquids
- OEM equipment
- Hazardous areas
- Batching

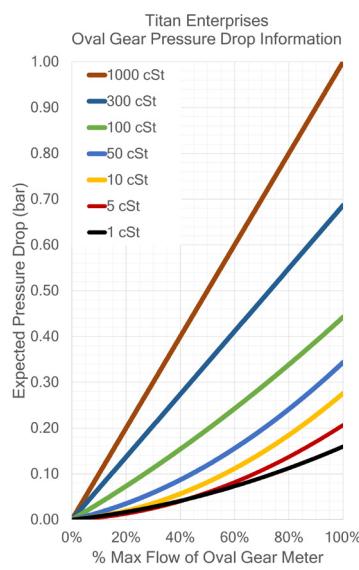

The rugged OG6 oval gear flowmeter is designed to give high performance with a low cost of ownership. It has a standard flow range from 2.0 to 200 L/min on 30 cSt oil and 10 to 200 L/min on water-like liquids. The standard inlet and outlet are 1½" female threads. For OEMs, alternatives are available, including manifold mountings. The standard models are 316 St St or Aluminium with Viton™ 'O' ring seals.

At the heart of the meter are a pair of toothed oval gears one of which contains chemically resistant magnets. Rotation is detected through the chamber wall by a Hall effect detector or a reed switch giving approximately 21 pulses per litre passed. The output is an NPN pulse or a voltage free contact closure either of which is readily interfaced with most electronic display or recording devices. This combination of materials and technology ensures a long life product with reliable, accurate operation throughout.



FEATURES

- Excellent chemical resistance
- Rugged construction
- Individual calibration
- High viscosity options
- Low pressure drop
- No flow conditioning required
- Hall, reed switch or Namur sensor
- Accuracy 1.0% reading water
0.5% reading oil (30 cSt)
- 0.1% repeatability
- IP65/NEMA 4 protection
- Models to 400 bar

OG6 200L/Min Oval Gear Meter

titan



Ordering Codes

Model

OG6

Body Material

S = 316 St St 50 bar std

A = Aluminium 10 bar max

Temp Rating

S = 80°C / 158°F

T = 100°C / 212°F

U = 150°C / 300°F

Pressure Rating

5 = 50 bar 750 PSI (St St)

1 = 10 bar 150 PSI (Al)

4 = 400 bar 5880 PSA (St St)

Seal Material (seal temperature range)

V = Viton™ (-20 to +150°C)

N = Nitrile (-20 to +100°C)

E = EPDM (-30 to +150°C)

P = PTFE (50 bar max) (-30 to +150°C)

K = Kalrez® (-10 to +150°C)

Detector Type

H = Hall effect

R = Reed switch & Resistor

N = Namur

X = Reed switch (hazardous area)

Process Fitting Size

P = 1½" (OG6 std)

Process Fitting Type

B = BSP F

N = NPT F


e.g. **OG6-SS5-VHP-B** is a stainless steel meter rated at 80°C, 50 bar, Viton™ seal, Hall effect detector and a 1½" BSP thread.



TECHNICAL SPECIFICATIONS

Sample product codes	Stainless standard OG6-SS5-VHP-B	Aluminium standard OG6-AS1-VHP-B
Flow range	- Water - 30 cSt Oil	10 - 200 L/min 2.0 - 200 L/min
Wetted materials	- Body - Gears - Seal - Magnet - Spindles	316 St St Carbon filled PEEK Viton™ PTFE St St
Accuracy	- Water - 30 cSt oil	± 1.0% Reading ± 0.5% Reading
Repeatability		± 0.1%
Detector Type		Hall effect
Terminations		Terminal block P65 cable gland
Approx 'K' factor (Pulses/Litre)	21	21
Viscosity Range^	1-1000 cSt	1-1000 cSt

[^] High viscosity (above 1000 cSt) options available

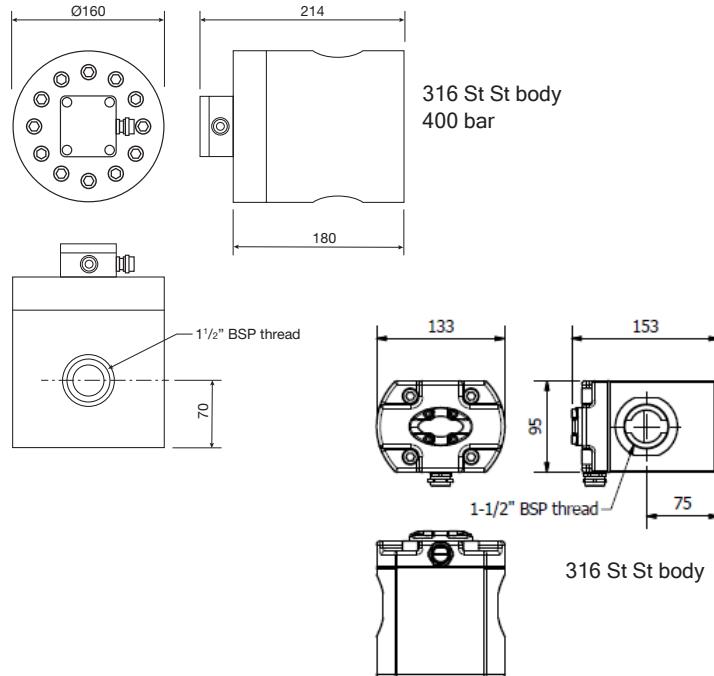

Weight (kg)

St St	50 bar	8.000
AL	10 bar	6.000
St St	400 bar	12.000

For reference only; for latest information contact your local distributor.

TITAN ENTERPRISES LTD.

Coldharbour Business Park, Sherborne, Dorset DT9 4JW

Tel: **(44) 01935 812790**

Email: **sales@flowmeters.co.uk**

Web: **www.flowmeters.co.uk**

Distributor: DDM GmbH & Co. KG

Phone: +49 661 967 962-0 >> Email: info@ddm-sensors.de >> Web: www.ddm-sensors.de 06/24